

VIKING ISA PLUG-N-PLAY JUMPER SETTINGS

To override the modem's default Plug-n-Play settings, use the following jumper configurations:


COM Port Number	I/O Address	S1	JP4-JP6	JP8
COM 1	3F8-3FF	2,4 ON	1,2 ON	OFF
COM 2	2F8-2FF	2,6 ON	1,2 ON	OFF
COM 3	3E8-3EF	1,4 ON	1,2 ON	OFF
COM 4	2E8-2EF	1,6 ON	1,2 ON	OFF
Interrupt Assignment		Jumper S1 Setting		
IRQ 3		5 ON		
IRQ 4		3 ON		
IRQ 5		7 ON		
IRQ 7		8 ON		

The default interrupt and I/O address assignments for each COM port are as follows:

COM Port Number	Interrupt Assignment	I/O Address
COM 1	IRQ 4	3F8-3FF
COM 2	IRQ 3	2F8-2FF
COM 3	IRQ 4	3E8-3EF
COM 4	IRQ 3	2E8-2EF

Note: Your system may require deviation from the above defaults.

The following Jumper settings are examples of different COM Ports:

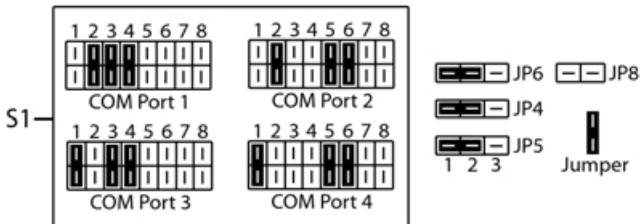

www.vikingcomponents.com

Copyright © 1999 Viking Components, Inc.
 Manual No. 1005291 • Release 10/99, Rev. A